COMFORT ENDURANCE FABRIC WALL PANELS

SPECIFICATION DATASHEET

APPLICABLE CLAUSES : UNICLASS - Ss 25 25 05 Acoustic Panel Systems
CWAS - K13 170 Acoustic Panel Lining

Description : Comfort Endurance Fabric Wrapped Wall Panels

System Performance: Class A – 40mm thick Direct Fix Class C – 25mm thick Direct Fix

System Supplier:


Movawall Systems Ltd
Southern Office
63 Barwell Business Park
Leatherhead Road
Chessington, KT92NY
Tel: 0208 391 8750
Email: info@movawall.co.uk
Web: www.movawall.co.uk

Movawall Systems Ltd
Northern Office
Unit 15 Bridge House
Business Centre
Harrow Road
Bolton, BL1 4NH
Tel: 07703 322082
Email: info@movawall.co.uk
Web: www.movawall.co.uk


Movawall Systems Ltd
Scottish Office
Ayr
KA7 1EN
Tel: 01292 265 273
Email: info@movawall.co.uk
Web: www.movawall.co.uk

Battens: Non applicable, Direct Fix

Acoustic Performance:

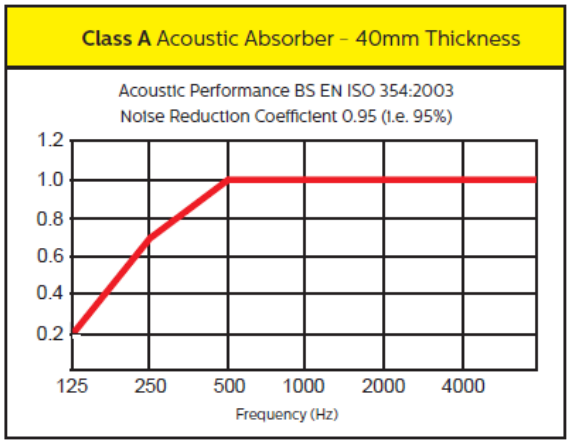

Direct fixed backing

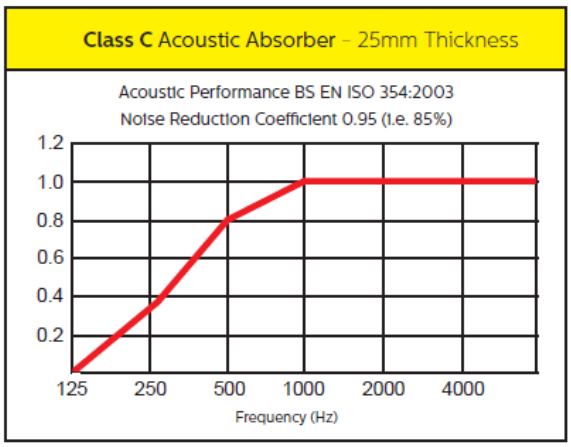

Direct fixed backing
Higher absorption can be achieved when installed with a cavity

Panelling: High Density Sound Absorbing Fibreboard Core finished in our standard range fabric, Camira Sonus, Lucia, Cara or Era (other finishes available on request).

Impact Resistance: Tested to **DIN 18032-3: 2023-12** Sports halls, gymnastic halls, games and multi-purpose use-Part 3: tested for safety against ball throwing – Test Date 25/4/2025

Fire:		
	Core Board	EN13501-1:2018 A2-s1, d0 and Class O fire rating to BS476: Part 6
	Sonus	EN13501-1, Class B, s1, d0
	Era	EN13501-1, Class B, s1, d0
	Lucia/Cara	Class 1 to BS476: Part 7 and EN13501-1, Class B, s1, d0

Class O Fabrics can be supplied on request

Weight: 40mm thick = 5kg/m_2 25mm thick = 4kg/m_2

Standard Panel Sizes: 1200mm (w) x 600/900/1200/1800/2400/2700mm (h)
Other sizes or site specific available on request

Dimension Tolerance of Panels: +/- 4mm

Installation: Concealed Fixing Plates and Adhesive